


HT

MANUALLY. EASILY. PRECISELY. THE HT.

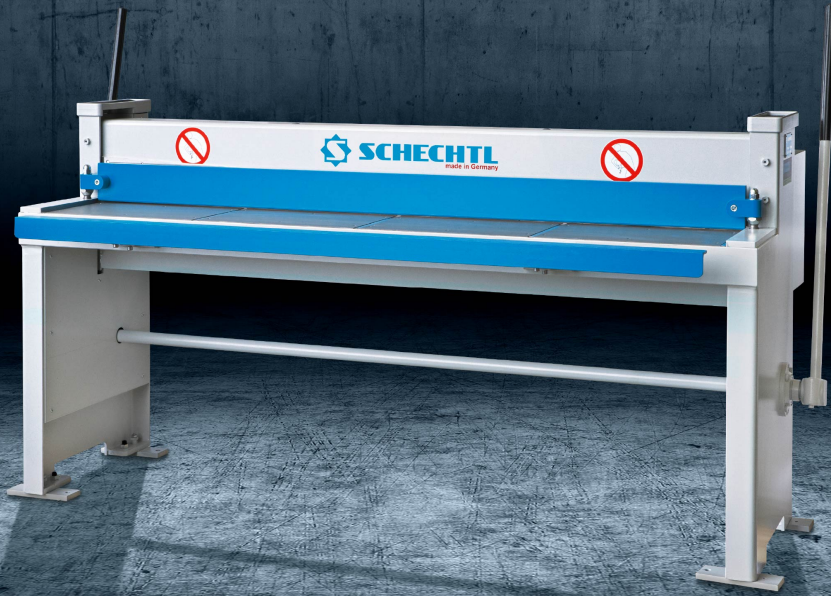

The cutting quality of the HT manual plate shears sets benchmarks and equals that of motorized plate shears. It can be used wherever a power supply is not available or necessary. The profile spectrum ranges from the HT 100 with 1040 mm working length to the HT 310 with a working length of 3140 mm. The efficient, ergonomic design and the comprehensive range of accessories make the HT a real all-rounder.

BENEFITS

- ✓ **Precise** cutting quality on a par with that of motorized plate shears
- ✓ **Compact dimensions** – ideal for locations with little available space
- ✓ **Power-saving** triggering of the cutting movement
- ✓ **Efficient and cost-saving** 1-man operation
- ✓ **Maintenance-free** bearings and guides
- ✓ **Extensive accessories** available
- ✓ **Hold-down unit with slip-proof hard rubber insert** holds the sheet firmly in position

TECHNICAL DATA

Subject to change

MODEL	HT		310	250	200	150	100
WORKING LENGTH		mm	3140	2540	2040	1540	1040
OUTPUT	Steel (400N/mm ²)	mm	1,00	1,00	1,25	1,50	1,75
	Stainless steel (600N/mm ²)	mm	0,60	0,60	0,80	0,80	1,00
	Aluminium (250N/mm ²)	mm	1,50	1,50	1,75	2,00	2,25
DIMENSIONS	Length	mm	3524	2942	2442	1942	1442
	Depth	mm	905	905	905	905	905
	Overall height	mm	1500	1500	1500	1500	1500
WEIGHT		kg	920	740	650	560	470

SERIES EQUIPMENT

The following series equipment is possible depending on the version (working length/control):

- ✓ Steel shear blades
 - ✓ Extending table
 - ✓ Supporting table with 10 mm scale
 - ✓ Backgauge 0-750 mm
-

ADD-ONS - OPTIMISE YOUR HT

The following add-ons are possible depending on the version (working length/control):

- ✓ Shear blades for stainless steel
 - ✓ Backgauge 750 mm with tilting table
 - ✓ BV gauge 750 mm
 - ✓ Cutting gap illumination via LED
 - ✓ Sheet metal slide
 - ✓ Blank wagon (load capacity 300 kg)
 - ✓ Mitre angle limit
-

All details onHT