


UK-DB

BENDING BRILLIANCE. THE UK-DB.

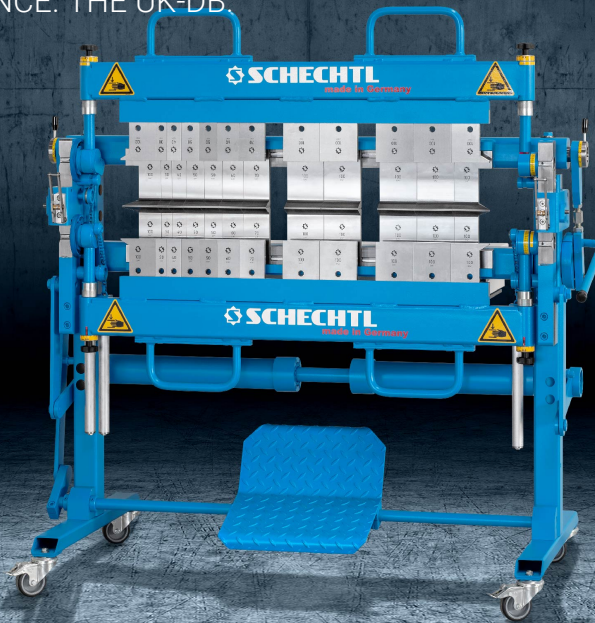

With the UK-DB, you take your bending processes to the next level: The innovative dual-bending-beam function of the UK-DB allows bending from both the top and bottom – with no need to rotate the workpiece. The result? Precise angles, significantly reduced handling times, and a noticeable boost in efficiency – especially for complex geometries and delicate details.

BENEFITS

- ✓ **Bending Both Ways** – No Re-Clamping
- ✓ **Precise angles** and high repeatability – even with delicate geometries
- ✓ **Less work**, faster results
- ✓ **Tool-free segment change** – fast, safe, easy.

TECHNICAL DATA

Subject to change

MODEL	UK-DB		100	125
WORKING LENGTH		mm	1000	1250
OUTPUT	Steel (400N/mm ²)	mm	1,50	1,25
	Stainless steel (600N/mm ²)	mm	1,00	0,80
	Cooper (300N/mm ²)	mm	2,00	1,50
	Aluminium (250N/mm ²)	mm	2,25	2,00
	Zinc (150N/mm ²)	mm	2,00	2,00
DIMENSIONS	Length	mm	1537	1787
	Depth	mm	740	740
	Overall height	mm	1595	1595
WEIGHT		kg	390	430
CLAMPING BEAMS	Opening height	mm	96	96

SERIES EQUIPMENT

The following series equipment is possible depending on the version (working length/control):

- ✓ Segments with quick clamping system
 - ✓ Clamping beam pressure setting
 - ✓ Bending beam lowering
 - ✓ Storage box
 - ✓ Foot pedal
 - ✓ Castors
-

ADD-ONS - OPTIMISE YOUR UK-DB

The following add-ons are possible depending on the version (working length/control):

- ✓ Clamping beam segments in R 2 mm
 - ✓ Clamping beam segments in R 3 mm
 - ✓ Back gauge 1000 mm
 - ✓ Workpiece support
 - ✓ Universal backgauge table UA125
 - ✓ Windowsill insert, standard
 - ✓ Windowsill insert, variable (6-part)
-

All details onUK-DB