




SPECIAL

MANUAL SEGMENT BENDING

MACHINES FOR COMPLEX FORMS
IN SHEET METAL PROCESSING

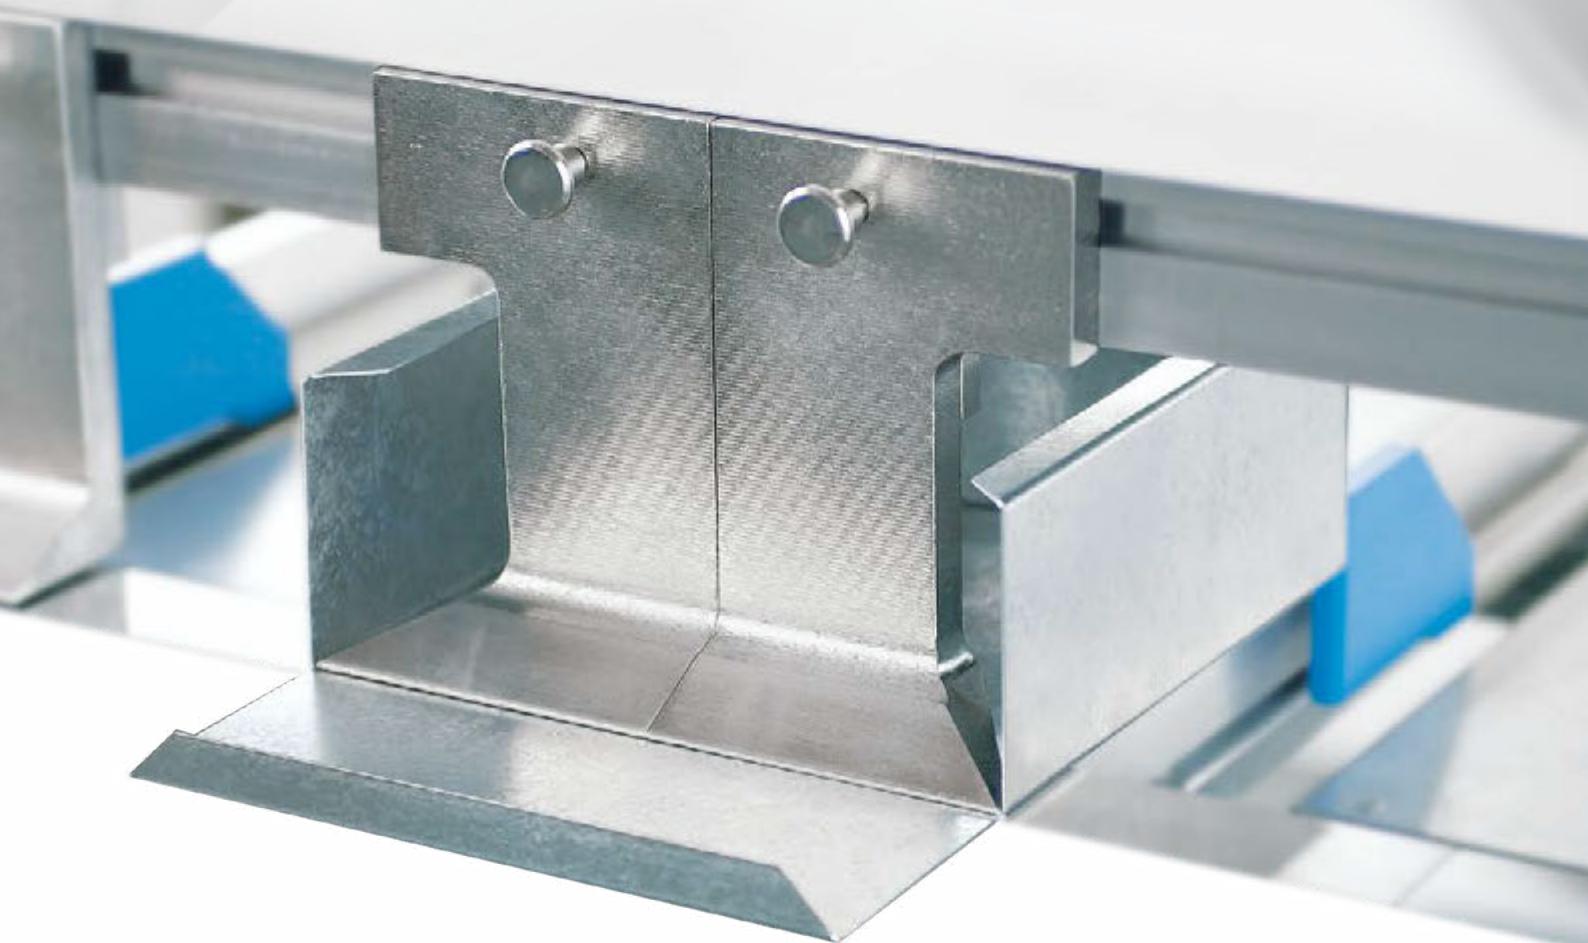

 SCHECHTL

WE WANT TO CONTRIBUTE TO YOUR SUCCESS

PIONEERING SPIRIT AND INNOVATION BORN OF PASSION
FOR THE SHEET METAL TRADE.

WE TRULY GO THE DISTANCE TO HELP YOU GET AHEAD

You know it's true because you have experienced it yourself, just like generations before you: we listen to you, our customer. This is how we get our ideas and develop our machines which have made the daily work of sheet metal workers in industry and trade easier and more efficient for decades.

Since our foundation in 1910 as a simple blacksmith shop, this pioneering spirit has driven us forward, always with an eye to creating value for our customers. Before the invention of bending technology, this standard led to countless innovations including time-efficient mobile data transfer of completed profiles from the job site directly to the machine.

The same is true for segment bending. Well over 10.000 sheet metal workers currently use our segmented rail system solutions to produce complex forms in a logical work cycle. A head start is created by exchanging knowledge - both sides profit.

LOYALTY MEANS QUALITY

Very high quality, incredible durability, and outstanding reliability – that's what generations of sheet metal workers all over the world have said about our products. While we're extremely honored by these words, they also motivate us to keep our "Made in Germany" seal of quality at a high level.

With solid commitment to our location, we produce and assemble numerous machine parts exclusively in Germany – most of them in Bavaria. This strong connection to regional partners and suppliers is a foundation for quality. This type of thinking and customer satisfaction is what has made Schechtl the world's leading manufacturer of bending machines and shears for thin sheet processing.

THANK YOU FOR CHOOSING SCHECHTL

Schechtl is a family business, owner-operated for over 100 years and now in its fourth generation. A combination of healthy growth and strong economic stability means that our corporate development strategy is geared towards the long haul.

That's why we not only invest in technology, but also in creating an atmosphere of positivity and trust as well as in the knowledge of our employees. Because ultimately, the thing that truly helps a business get ahead is the commitment and competence of the people who determine its path. Satisfied employees are more committed, which our customers can observe daily.



Maria Schechtl
Managing Director



PRODUCT FINDER

THE RIGHT COMBINATION OF WORKING LENGTH,
BENDING PERFORMANCE AND PRODUCTION REQUIREMENTS
WILL HELP YOU FIND THE IDEAL SEGMENT BENDING MACHINE.

1. DO YOU PRODUCE CLOSED FORMS, BOXES, CASSETTES AND THE LIKE AT THE JOB SITE?

2. DO YOU DO A LOT OF MANUAL PRODUCTION ON THE SHOP FLOOR?

3. DO YOU NEED MORE FREE SPACE FOR DIFFERENT TYPES OF COMPLEX FORMS?

- Specialist for mobile segment bending at the job site:
→ **TBS** (page 7)
- Experienced professionals for individual workpieces, prototypes, special structures and sporadically recurring small series:
→ **UK, UKV** (pages 8 – 9)
- For more free space of movement in manual segment bending:
→ **UKF** (page 10)
→ **SB** (page 11)
→ **UK-DB** (page 12 – 13)

Areas of application	Segment bending					
	Job site	Shop floor				
Machine type	TBS	UK	UKV	UKF	SB	UK-DB
Drive type	manual					
Working length	2x550					1.00
	1040	0.63	1.50	2.00	1.50	1.50
	1250	0.63	1.25	1.75	1.50	1.25
	1540			1.50	1.50	
	2040			1.00	1.00	
Control systems	manual					

Bending capacity for steel 400 N/mm², based on standard segment heights



SEGMENT BENDING

Segment bending machines are particularly cost-effective; they produce closed forms easily, precisely and also save time as well as comfortably manage individual orders and small series at the job site or on the shop floor.



JOB SITE

Mobile, comfortable and manageable like no other. The **TBS** is your best bet for precise segment bending at every area of the job site.



Segment bending on the shop floor: that is what our manual **UK** models, proven thousands of times over, stand for.



MASTERFUL VARIETY OF FORMS IN ROOFS AND EXTERIORS

TRICKY AND COMPLICATED FORMS MADE EASY: WITH A SEGMENT BENDING MACHINE,
YOU CAN GET THE PERFECT FORM FOR BOXES, CASSETTES, WINDOW SILLS AND THE LIKE.

TBS

UK

UKV

UKF

SB

UK-DB



CLEVER SEGMENT BENDING – COMPLEX FORMS MADE EASY

EASY AND SAVES TIME. NO TOOLS NEEDED.

COMPLEX FORMS MADE EASY – IN ONE WORK CYCLE WITHOUT CONVERSION TIME

Segment bending machines are equipped with segmented rail system. The bending rail consist of individual segmented tools. Clever combination and the free space between the segmented tools make it possible to bend workpieces on all sides. You can use it to produce tricky and complicated forms quickly and easily.

You can lay out several segment stations next to each other and implement successive work steps rationally and without conversion time, all in one machine and in one work cycle.



BENEFITS

THE QUICK CLAMPING SYSTEM INCREASES PRODUCTIVITY IN SECONDS

The manual bending machines from Schechtel are equipped standard with the patented quick clamping system on the clamping, lower and bending beam. The concept makes it very simple to rearrange tools. Tried and tested thousands of times in practice. As you neither need tools or screws, you gain valuable time and increase productivity.

THE VARIETY OF FORMS IS ENORMOUS

Elaborate box forms, special forms, samples and window sills are easy to produce in an efficient way.

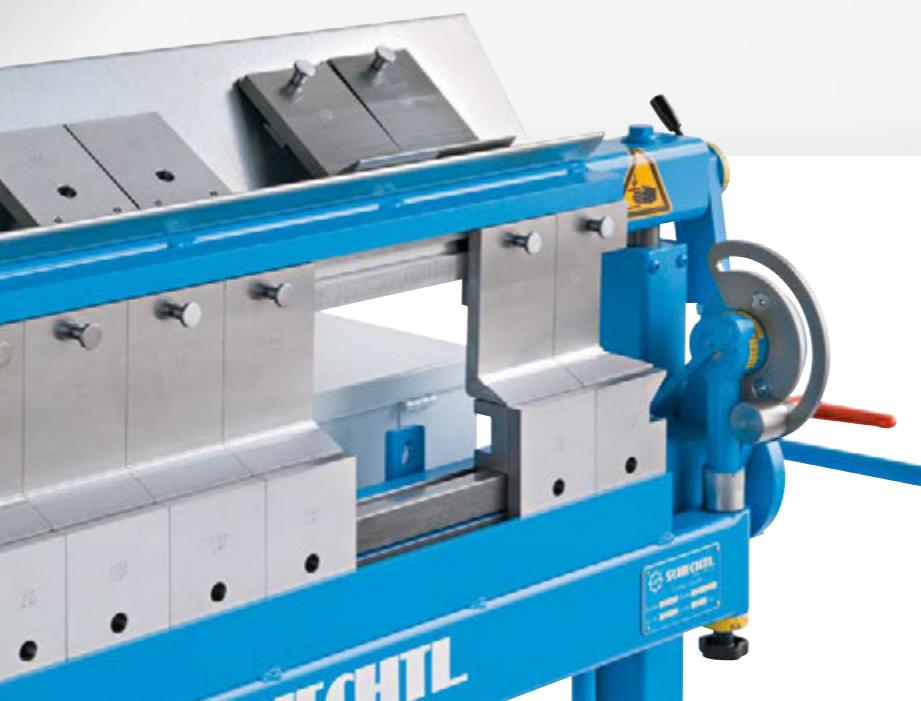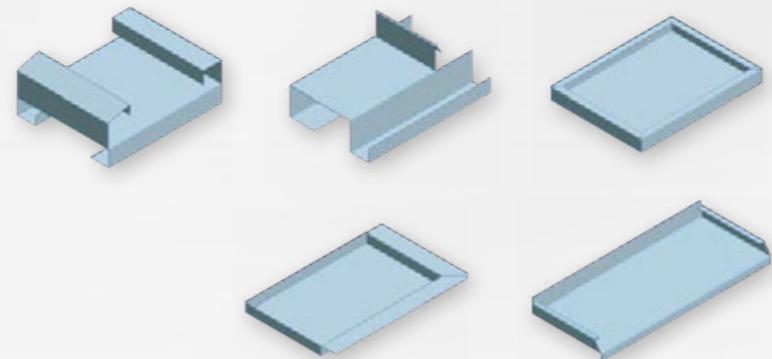

MOBILE LIGHTWEIGHT AT THE JOB SITE

AGILE AND MOBILE. EASY HANDLING.



BENEFITS


BOXES, CASSETTES AND THE LIKE IN ONE WORK CYCLE

- rational and productive – all segments can be adjusted without tools
- The **TBS** masters even 25 mm and 35 mm rollformed seams for eaves and ridge folds
- with the **TBS**, sheet metal workers avoid any "surprises" at the job site and can work completely self-sufficiently in profile production

CONVENIENCE

EFFORTLESS ON THE JOB SITE

- 1 worker alone can easily transport and operate the **TBS**
- The **TBS** (without X-shaped support stand) can be installed on a workbench or in a construction vehicle
- Foldable X-shaped support stand with rollers and handle (available as an option)
 - Stable and convenient to transport
 - Simply pull it behind you like a roller suitcase
- Reduce transport weight – segments are transported in a separate box where they are stored safely and optimally protected

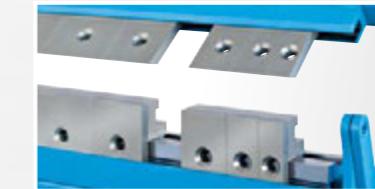

TECHNICAL FEATURES

- all beams have 40 mm free space of movement
- the clamping beam only has a 45 degree flat slope – this offers additional free space for refined seamed profiles with long limbs
- the roller shear is a useful accessory for cutting sheets directly on the machine (optionally available)

TRANSPORTABLE. JOB SITE. SEGMENT BENDING.

Your area of application spells out the **TBS**. The smallest of the manual segment bending machines in the Schechtel range is huge when it comes to its flexibility on the job site.

Thanks to its small dimensions, you can easily move the **TBS** on the job site, as well as between floors, on scaffolding and in small areas.

TBS



TBS with foldable X-shaped support stand (optionally available)

TWO, WHO LIKE TO SHARE - STRONG SPECIALISTS FOR THE SHOP FLOOR

THE SPECIALISTS FOR TRICKY TASKS.

HIGH QUALITY FOR SPECIAL FORMS

Two manual bending machines master tricky special designs as well as everyday supplemental bends on workpieces, boxes, cassettes requirements.

The **UK** and the stronger **UKV** are your specialists for closed special forms. The segments are cleverly positioned, and several work steps are completed without conversion time. The rational work flow is maintained while conversion of the motorized machines becomes unnecessary.

The **UK** and **UKV** are ideal for single-piece production and small series as well as prototype construction in the trade sector.

**proven
10,000
times**

BENEFITS

ADJUSTMENT WITHOUT TOOLS - A HUGE ADVANTAGE FOR SAFETY, PRECISION AND SPEED

- clamping, lower and bending beam with patented quick clamping system is standard
- combine and rearrange any segments in a flash – without using tools and screws
- intelligent segment combination of several work steps can be executed in a rational manner without conversion time
- take out individual tools - this creates free space between the segments for closed workpieces



Use storage box as work surface
(without back gauge)

TECHNICAL FEATURES

COUNTLESS PRACTICAL DETAILS MAKE EVERYDAY WORK EASIER

Adjustments without tools – a huge advantage for safety, precision and speed.

- lower bending beam with hand wheel and scale
- set clamping beam pressure with a lever
- equipped with wheels, the **UK** (standard) and the **UKV** (optionals) - can be set up at any point in your production
- standard foot pedal – hands-free work throughout the entire production process
- segments not currently in use can be easily stored in a storage tray located above the clamping beam
- the storage box for all segments is located in a space-saving location under the back gauge, or can be used as a tool tray in the standard model



ACCESSORIES

OPTIONAL ACCESSORIES

- high clamping beam segments 140 mm + 160 mm (**UK+UKV**) 180 mm (**UKV** only) (Standard = 100 mm)
- clamping bar segments with 2 mm and 3 mm radius, zinc and aluminum can be bent more gently due to the larger curve
- various back gauge systems
- inserts for producing windowsills
- roller shear
- wheels with chassis (**UKV**)



UK POWER



UKV MORE POWER



THE ONE WITH EXTRA HIGH SEGMENTED TOOLS – FREE SPACE XXL

DOUBLE AMOUNT OF FREE SPACE FOR LARGE SPECIAL FORMS.

ALL THE QUALITIES OF THE UKV – ONLY MUCH BIGGER! NEW PEAK PERFORMANCE IN MANUAL SEGMENT BENDING.

The "F" stands for "flexible". With larger dimensions and countless benefits, the **UKF** is the perfect pick: the **UKF** has room for 160 mm- and 180 mm-high segmented tools on the clamping beam. The segmented tools of the lower and bending beam are 120 mm-high, these are **100% more free space**. The working height was increased by 160 mm compared to the **UKV**. Large-format sheets can be processed with better ergonomics.

BENEFITS

SAVE MONEY AND MAKE PRODUCTION MORE CONVENIENT:

The extreme free space makes it possible for sheet metal workers to create larger closed forms. In addition, there is more flexibility and throughput in the workflow.

Higher segments are often special tools on other machines. What needs to be manufactured separately on those machines is standard with the **UKF**.

The **UA 125** universal back gauge table expands the spectrum for recurring profiles in particular. The back gauge table is equipped with wheels and can be used on several **UK** models.


ACCESSORIES

OPTIONAL ACCESSORIES

- 180 mm-high segments for the clamping beam (standard = 160 mm)
- segments for the clamping beam with 2 mm or 3 mm radii, zinc and aluminium can be bent thanks to the larger curve
- **UA 125** universal back gauge table
- rolling device (wheels) for **UKF**



Special series in a work cycle, mobile **UA 125** universal back gauge table for sheet control.

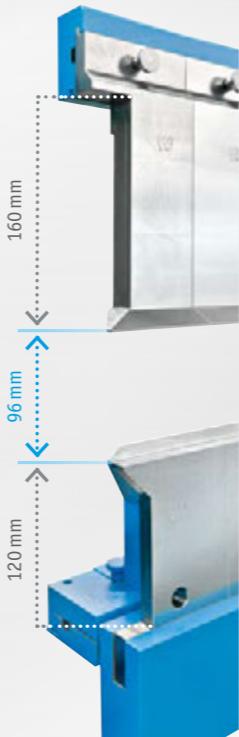

UKF



THE SHINGLE SPECIALIST FOR SMALL AND LARGE SERIES

FAST AND EFFECTIVE. BRILLIANTLY EASY.



BENEFITS

SHINGLES, RHOMBUSES AND THE LIKE ON TWO SIDES IN ONE OPERATION

- formats such as shingles or rhombuses can be processed in dimensions of 20-50 cm bending length
- special round rails with a 1.25 mm radius on both clamping beams enables the bending of hems in one operation

CONVENIENCE

EASY OPERATION

- one worker alone can operate the machine through the unique bending beam segments with an ergonomic working height and practical foot pedal
- precise and repeatable positioning of the flat patterns with the standard back gauge
- due to the special design, 24 conventional working steps are reduced to only 8 – you save approx. 70% of your time

TECHNICAL FEATURES

- two accurate 180° edges in one operation
- hems without additional pressing
- repeatable work processes with two bends on two sides in one operation
- 100 mm free space on upper beam with special round rails in radius 1.25 mm
- segmented lower beam with 20 mm free space

SERIES PRODUCTION IN THE SEGMENT BENDING FIELD

The advantages of the **SB** speak for themselves

- ✓ manually
- ✓ mobile
- ✓ cost-efficient
- ✓ repeatable accuracy

SB



THE ONE FOR DOUBLE-SIDED BENDING

DOUBLE ADVANTAGE WITH TWO BENDING BEAMS



SEGMENT BENDING



SHOP FLOOR

THE CHALLENGE

Bending complex profiles takes time, precision, and often multiple steps: Rotate, reposition, check – all of which slow down your productivity.

THE SOLUTION

With the **UK-DB**, you bend **from both above and below** – no need to rotate the workpiece.

Two bending beams work perfectly together – for **maximum precision, efficiency, and repeatability**.

The result: **faster, more accurate, and simpler operation – every day.**

BENEFITS

DOUBLE PRECISION. DOUBLE EFFICIENCY.

- Bend in both directions – no repositioning required
- Tool-free segment change – quick & easy
- Accurate angles, high repeatability
- Less handling, more productivity
- Perfect for special shapes & series production


MAXIMUM FLEXIBILITY

The 100 mm-high segments on all beams can be **changed without tools** – ideal for prototypes, small series, or special shapes.

PRODUCT VARIANTS

1,000 mm working length – bending capacity for steel up to 1.50 mm

1,250 mm working length – bending capacity for steel up to 1.25 mm

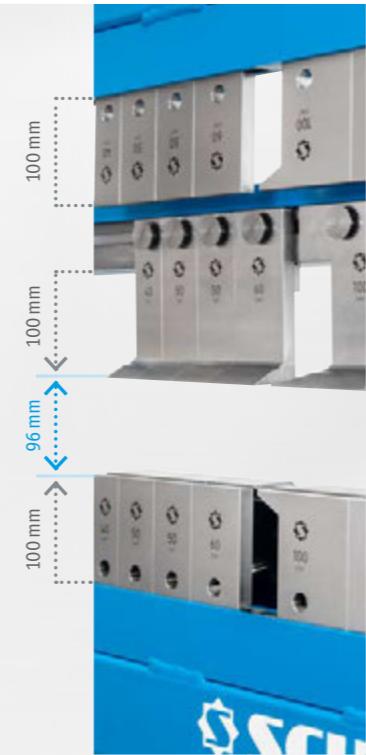

ACCESSORIES

LINEAR STOP FOR MAXIMUM PRECISION

- Laterally adjustable & removable without tools
- With millimeter scales and lockable stop fingers
- Makes reproducible series bending easy
- Support arms can be stored directly on the machine



Linear Stop 1,000 mm (optional)

OTHER ACCESSORY OPTIONS:

- Upper beam segments with 2 mm or 3 mm radius
- Magnetically positionable workpiece support
- Universal Stop UA 125 (1,000 mm depth)
- Window sill inserts – standard & adjustable (for 100 mm segments)

TYPICAL APPLICATIONS

Whether standing seam shears up to 3 meters, façade profiles like interlocking panels, or double-sided bent end treatments – the **UK-DB** shows its strengths wherever **precision, flexibility, and clean work** are required.

UK-DB



The bending process





MASTERFUL EXTERIORS WITH CLASSIC DESIGN

CONNECTING TRADITION AND MODERNITY MEANS HAVING HIGH STANDARDS FOR SHEET METAL PROCESSING. COMPLEX SEGMENTED FORMS ARE THE DOMAIN OF THE SCHECHTL SEGMENT BENDING MACHINES.

Reliable handling for all segment bending requirements

Metalworkers love reproducing beautiful forms

Real beauty come to light, and the metalworker makes it happen

Historical treasures are well protected by first-class formed sheets

ACCESSORIES

CONFIGURE YOUR SEGMENT BENDING MACHINE TO YOUR INDIVIDUAL REQUIREMENTS. THE OPTIONAL ACCESSORIES PROVIDE GREATER CONVENIENCE, PRECISION AND SAVES TIME AS WELL.

Areas of application	Segment bending					
	Job site	Shop floor				
TBS	UK	UKV	UKF	SB	UK-DB	

ROLLER SHEAR



Mobile roller shears for the **TBS** model.

TBS

TBS X-SHAPED SUPPORT STAND: MOBILE, FOLDABLE, ROLLABLE



TBS

BACK GAUGE



1000 mm

UK

UK-DB

BACK GAUGE WITH SPUR RACK



60-500 mm

UKV

CLAMPING BEAM SEGMENTS



Radius according to customer requirements.

UK

UKV

UKF

UK-DB

HIGH CLAMPING BEAM SEGMENTS




UK

UKV

UKF

For more flexibility in the production of larger closed shapes.

STANDARD WINDOW SILL SEGMENTS

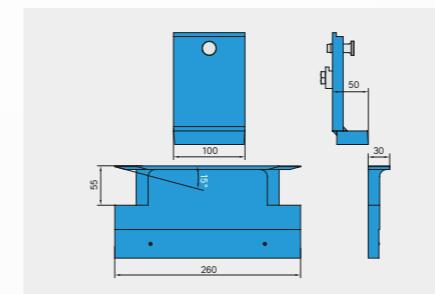


UK

UKV

UKF

UK-DB

VARIABLE WINDOW SILL SEGMENTS (6-PIECE)

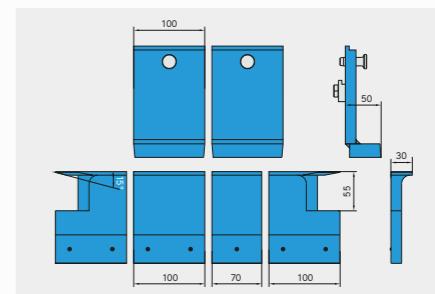

UK

UKV

UKF

UK-DB


UKF/UKV ROLLING DEVICE (WHEELS) FOR MORE MOBILITY ON THE SHOP FLOOR



UKV

UKF

WORKPIECE SUPPORT

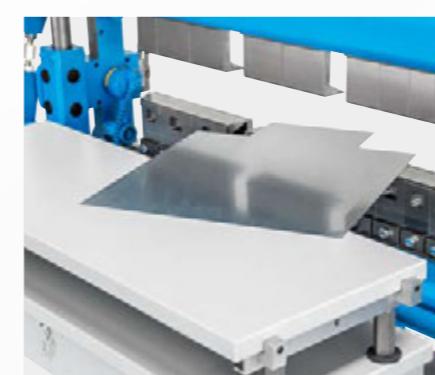

Magnetically positionable.

UK

UK-DB

UA 125 UNIVERSAL BACK GAUGE TABLE



UK

UKV

UKF

UK-DB

Sheet metal supply with freely-adjustable magnetic guide rails.

TECHNICAL DATA

PERFORMANCE, DIMENSIONS AND WEIGHT.



TBS

Model	100	125
Working length	mm 1,000	1,250
Bending capacity		
Steel 400 N/mm ²	mm 0.63	0.63
Aluminum 250 N/mm ²	mm 1.00	1.00
Stainless steel 600 N/mm ²	mm 0.50	0.50
Copper 300 N/mm ²	mm 0.80	0.80
Zinc 150 N/mm ²	mm 1.00	1.00
Overall dimensions		
Length	mm 1,235	1,369
Depth with X-shaped support stand	mm 698	698
Total height with X-shaped support stand	mm 1,133	1,156
Weight		
TBS machine without X-shaped support stand	kg 84	114
TBS X-shaped support stand	kg 17	17
Partition of segments		
Per 1 corner left + right 100 mm		
Per 1x30/40/50/60/70 mm + 6x100 8x100		
Lower and bending beam segments		
Height	mm 100	100
Clamping beam segments		
Height	mm 100	100
Clamping beam opening height		
Height	mm 96	96

Page 7



Page 8




Page 9









Page 10



Page 11



Page 12 - 13

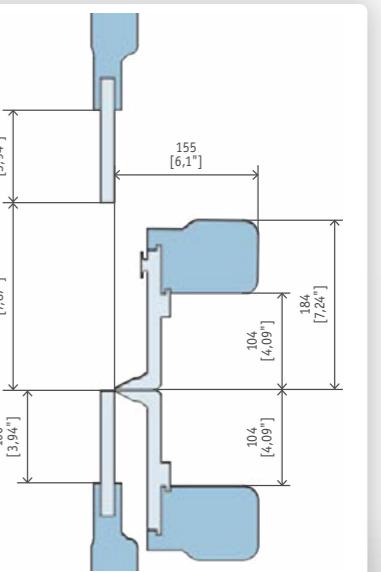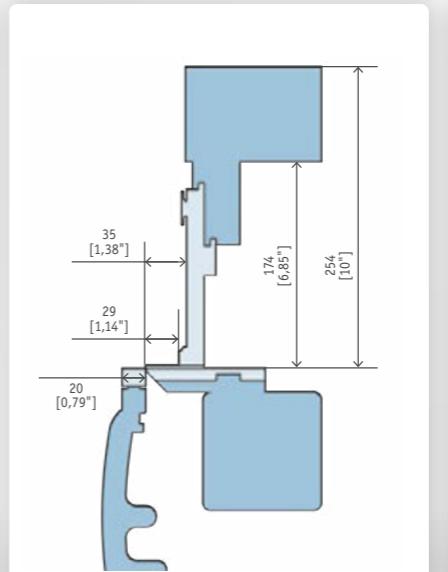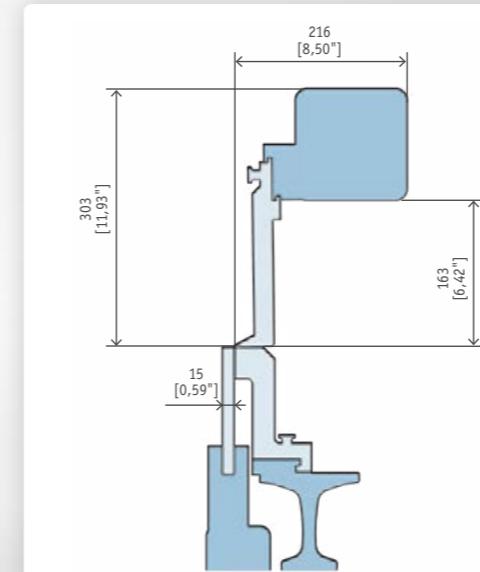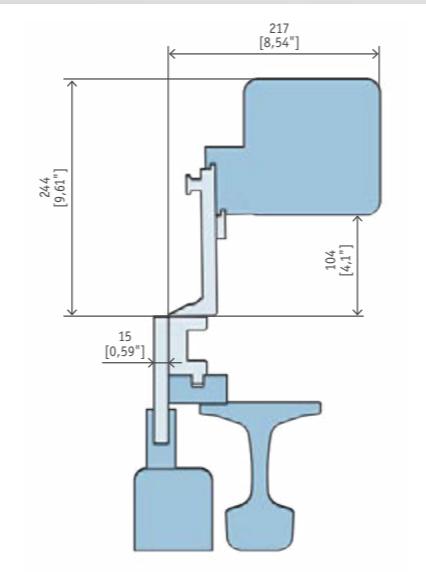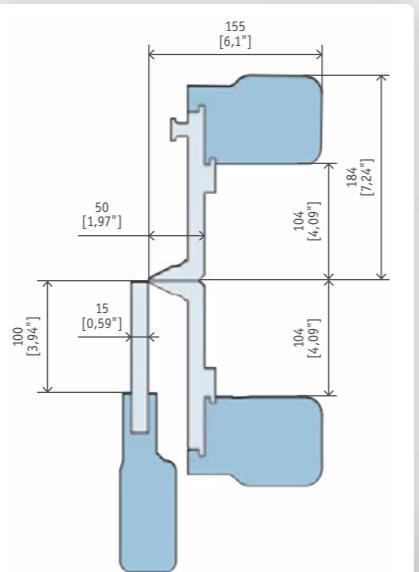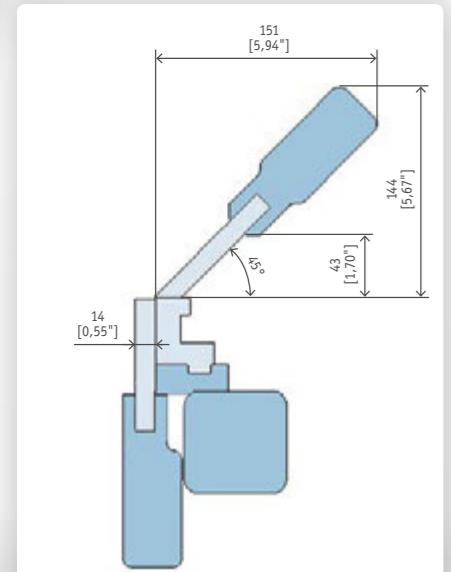

LINE-UP OF MACHINES

MACHINES FOR THE ENTIRE
RANGE OF TOP-QUALITY METALWORKING
AS OF 11/2025

MANUAL BENDING MACHINES



TBX

- Single-user lightweight for the job site
- Max. portability, solid, ready to use in 2 min
- Unique X stand, foldable, on wheels



LBT

- Construction convenience: bending, cutting, beading
- Portable, wheel locks, smooth-running
- Versatile options for clamping beam rail



LBX

- Compact and powerful on-site bending
- Pretensioning for material type and thickness
- Optimal bending result across the working width



TBS

- Smart segment-bending at the job site
- Tool-free adjustment, many fold shapes
- Unique X stand, light, max. portability



UK

- Smart segment-bending, proven 10,000 times
- Combine elements without tools
- Foot pedal, frees up hands for positioning



UKV

- Segment-bending even more powerful/versatile
- Fast and tool-free segment adjustment
- Hands stay free for precision positioning



UKF

- Segment bending of large special forms
- Extra high standards for use – XXL freedom
- Hands stay free for precision positioning



UK-DB

- Bend in both directions – no repositioning required
- Tool-free segment change
- More Productivity



KS

- Incredibly versatile, fast, cost-effective
- Easy and convenient for creative profiles
- World's best-selling swivel bending machine



KSV

- Award-winning, cost-effective, versatile
- Handles many materials and thicknesses
- Produces remarkable profiles



HBM

- Special profiles only possible here
- Precise positioning of workpieces
- Simple lowering of bending beam



HA

- Sturdy package for single-user operation
- Specially designed for thick sheets
- Ideal configuration for recurring bends

MANUAL SHEARS



HT

- Resiliently sturdy: lasts for generations
- Single-user operation, economical precision
- Space-saving, maintenance-free, lots of accessories

MOTORIZED SHEARS



SMT

- Smallest 3-meter motorized squaring shear
- For thin sheets to strong materials
- Saves energy, space and time



MSB

- Small size of SMT with much more power
- Even more performance in single-user operation
- The powerful and cost-effective choice



MSC

- The pro for thin sheets and exterior work
- Two motors, equal power distribution
- High efficiency, min. energy consumption

SHEARS FOR CUT-TO-LENGTH LINE SYSTEMS



MT

- Integrated automatic shearing system
- For continuous operation in the production process
- Individually adaptable, minimal maintenance



ST

- Shearing system with best configurability
- Integration into serial production equipment
- For many other materials besides sheet metals



MCH

- Metal sheets are always available
- Modular design
- Customizable

PROFILING MACHINES



SZP

- Extra-long and very solid in ventilation work
- Straight-line profiling without distortion
- High operating cycle speed

MANUAL



SB50

- For the production of roof and facade shingles
- Only one work step for two 180° edges
- Time saving of approx. 70 %

MOTORIZED BENDING MACHINES



MAX

- Smart move to motor and monitor system
- Precision reproduction of complex profiles
- Single-user operation, sturdy, time-efficient
- Motorized model with best custom versatility
- Sturdy construction, high bending capacity
- The classic for 90 % of all bending jobs



MAX-F

- Maximum bending free space
- 14 mm free space behind the pivot point
- More space for profile geometries



MAB

- More power than MAX, better performance
- Powerful machine for roofs and exteriors
- Sturdy construction, minimal maintenance



MAZ CNC

- Best in series production and light metal
- Speed king: outstanding productivity
- Shortest setup times, rapid bending sequences



MAE CNC


- Economical in the industrial trade
- Most adaptable changeover system / 1-click
- Minimal setup times, versatile, compact




MAF CNC

- Maximum bending free space – without special tools
- 14 mm free space behind the pivot point
- Low risk of collision on the bending beam


PLANNING / NOTES

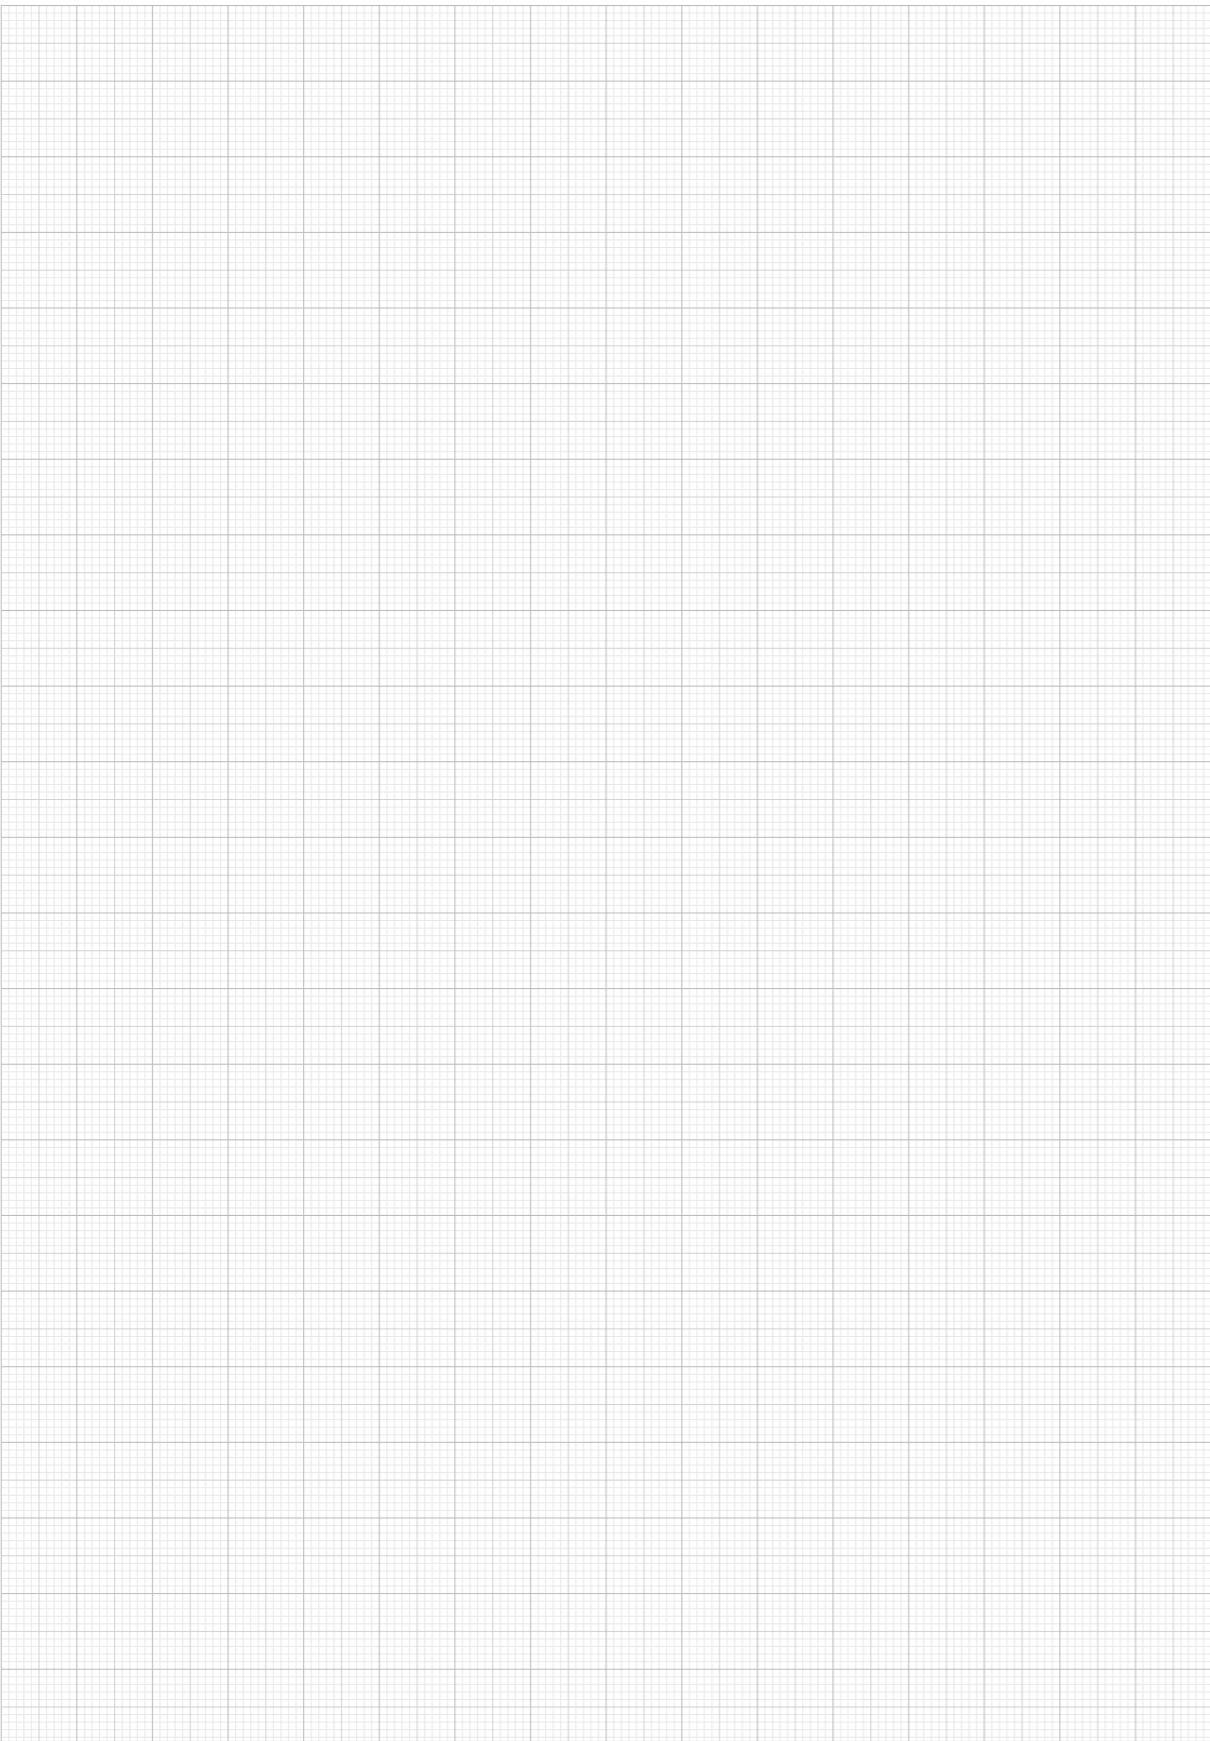

PLANNING / NOTES

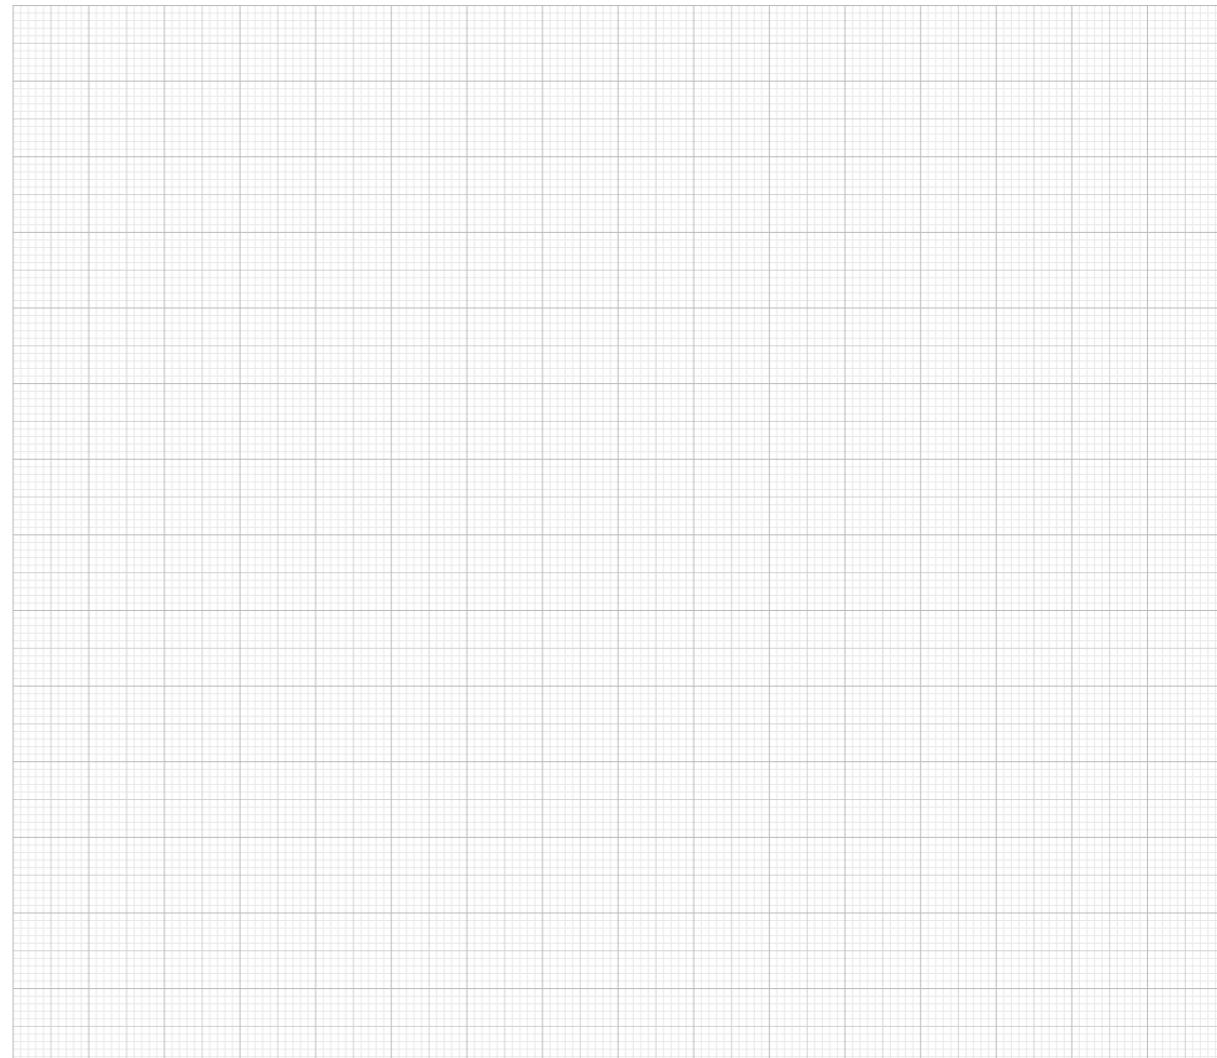

FURTHER PRODUCT INFORMATION

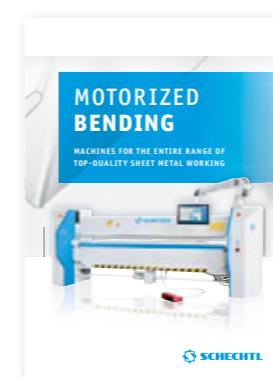

MOTORIZED BENDING
MACHINES FOR THE ENTIRE RANGE OF
TOP-QUALITY SHEET METAL WORKING



MANUAL BENDING
MACHINES FOR UNIVERSAL SHEET METAL PROCESSING
AT JOB SITES OR ON THE SHOP FLOOR



**MANUAL & MOTORIZED
SHEARS**
MACHINES FOR THE ENTIRE
RANGE OF TOP-QUALITY SHEET METAL WORK



**MODULAR
COIL-HANDLING**
MANUAL, FLEXIBLE, SYSTEMATIC

www.schechtl.de





Schechtl Maschinenbau GmbH

Viehhäuser Straße 4
83533 Edling

Tel +49 8071-5995-0
Fax +49 8071-5995-99
sales@schechtl.de

www.schechtl.de

